

equip

by



**Plumbing
Products**



Plumbing Products

Table of Contents

Electronic Faucets	1-2
Pre-Rinse Units	3-7
Low Profile Pre-Rinse Units	8
Faucets	9-18
Single Lever Faucet	19
Glass Fillers	19
Hose Reels	20-26
Accessories for All Models	27-29

Warranty

All Equip products are warranted to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Liability is limited thereunder to factory repair and/or replacement of material found to be defective, after examination by Equip, during the warranty period. No claims for labor, shipping costs or consequential damages will be accepted or honored. Replacement and/or repair under this warranty will be made within a reasonable time after receipt by Equip of the allegedly defective item.

Items which have received secondary finishing or have been altered in any way after purchase are not covered by this warranty. Claims resulting from damaged cartons must be filed with the carrier.

Some states do not allow limitations on how long an implied warranty lasts or on the exclusion of incidental or consequential damages, so all the limitations or exclusions appearing herein may not be permitted by your state and, therefore, your local statutes should be consulted with respect thereto or with respect to any other rights which your state statutes may specifically confer on you.

After receiving proper authorization, all returns of merchandise which are claimed defective under this warranty must be sent to: Equip, 2 Saddleback Cove, P.O. Box 1088, Travelers Rest, South Carolina, 29690, clearly marked to the attention of the Warranty Repair Department. Shipping charges, both ways, shall be paid by the customer.

Certification

Equip proudly displays the certifications of the International Standardization Organization (ISO), Underwriters Laboratories (UL), and CSA International (Canadian Standards Association). These certifications demonstrate that Equip consistently delivers the quality products and services on which its customers depend.

The company's ISO-9001:2015 certification is based on an evaluation of its performance of the jobs and processes that potentially affect product quality. By proving itself under these strict regulations, Equip guarantees its products will be manufactured to meet industry standards.





5EF-1D-DG Series Electronic Faucets

- Single hole deck-mount sensor faucet
- Rigid gooseneck with 2.2 GPM/8.3 LPM vandal-resistant aerator
- AC or DC powered control module
- Temperature control mixing valve



5EF-1D-DG

5EF-1D-WG Series Electronic Faucets

- Single hole wall mount sensor faucet
- Rigid gooseneck with 2.2 GPM/8.3 LPM vandal-resistant aerator
- AC or DC powered control module
- Temperature control mixing valve



5EF-1D-WG




5EF-0001
Control Module

Electronic Faucets Replacement Parts

- 5EF-0001 Control module
- 5EF-0002 AC transformer
- 5EF-0003 Flat lens and sensor wire assembly
- 5EF-0004 Convex lens and sensor wire assembly
- 5EF-0005 Flexible supply hose for 3/8" compression stops
- 5EF-0006 Electronic faucet mixing valve
- 5EF-FILTER Electronic faucet control module filter
- 5EF-TMV Thermostatic mixing valve with 1/2" NPSM male fittings

MODEL	Wall or Deck Mount	Gooseneck	Aerator /GPM / LPM	Supply Nipple	Notes
5EF-1D-DG Models					
5EF-1D-DG	Deck	5-11/16" (144 mm) rigid	B-0199-06 VR 2.2 GPM/8.3 LPM	N	
5EF-1D-DG-4DP	Deck	5-11/16" (144 mm) rigid	B-0199-06 VR 2.2 GPM/8.3 LPM	N	4" (102 mm) c/c deckplate
5EF-1D-DG-4DPWS	Deck	5-11/16" (144 mm) rigid	B-0199-06-WS VR 1.5 GPM/5.7 LPM	N	4" (102 mm) c/c deckplate
5EF-1D-DG-TMV	Deck	5-11/16" (144 mm) rigid	B-0199-06 VR 2.2 GPM/8.3 LPM	N	Thermostatic mixing valve
5EF-1D-DG-V5-HG	Deck	5-11/16" (144 mm) rigid	B-0199-06-N05 VR 0.5 GPM/1.9 LPM	N	Low flow hydrogenerator
5EF-1D-DG-V5THG	Deck	5-11/16" (144 mm) rigid	B-0199-06-N05 VR 0.5 GPM/1.9 LPM	N	Thermostatic mixing valve; Low flow hydrogenerator
5EF-1D-DG-WS	Deck	5-11/16" (144 mm) rigid	B-0199-06-WS VR 1.5 GPM/5.7 LPM	N	
5EF-1D-WG Models					
5EF-1D-WG	Wall	6-3/8" (162 mm) rigid	B-0199-06 VR 2.2 GPM/8.3 LPM	N	Short el
5EF-1D-WG-TMV	Wall	6-3/8" (162 mm) rigid	B-0199-06 VR 2.2 GPM/8.3 LPM	N	Thermostatic mixing valve
5EF-1D-WG-VF05	Wall	6-3/8" (162 mm) rigid	B-0199-06-N05 VR 0.5 GPM/1.9 LPM	N	
5EF-1D-WGAT	Wall	4-3/16" (106 mm) swivel	B-0199-06 VR 2.2 GPM/8.3 LPM	N	
5EF-1D-WGAT-THG	Wall	5-7/8" (149 mm) swivel	B-0199-06 VR 2.2 GPM/8.3 LPM	N	Thermostatic mixing valve; Low flow hydrogenerator
5EF-1D-WGAT-TMV	Wall	4-3/16" (106 mm) swivel	B-0199-06 VR 2.2 GPM/8.3 LPM	N	Thermostatic mixing valve
5EF-1D-WGMM	Wall	4-3/8" (111 mm) swivel	B-0199-01 VR 2.2 GPM /8.3 LPM	N	
5EF-1D-WGMM-HG	Wall	4-1/4" (109 mm) swivel	B-0199-01 VR 2.2 GPM /8.3 LPM	N	Low flow hydrogenerator

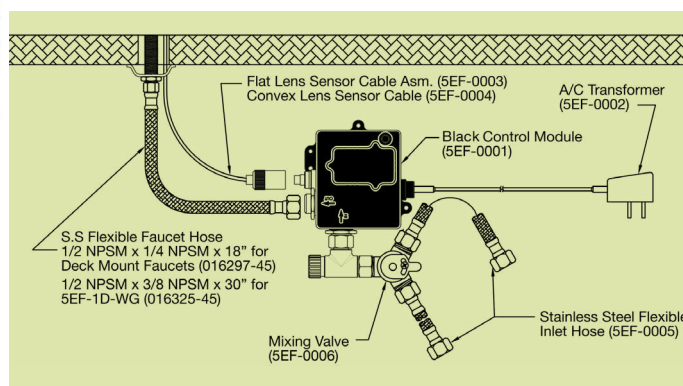



5EF-1D-DS Series Electronic Faucet

- Single hole deck mount sensor faucet
- Cast spout with 2.2 GPM/8.3 LPM vandal-resistant aerator
- AC or DC powered control module
- Temperature control mixing valve



5EF-1D-DS

MODEL	Wall or Deck Mount	Gooseneck	Aerator / GPM / LPM	Supply Nipple	Notes
5EF-1D-DS Models					
5EF-1D-DS	Deck	4-9/16" (116 mm) Cast spout	B-0199-09 VR 2.2 GPM/8.3 LPM	N	
5EF-1D-DS-4DP	Deck	4-9/16" (116 mm) Cast spout	B-0199-09 VR 2.2 GPM/8.3 LPM	N	4" c/c deckplate
5EF-1D-DS-TMV	Deck	4-9/16" (116 mm) Cast spout	B-0199-09 VR 2.2 GPM/8.3 LPM	N	Thermostatic mixing valve
5EF-1D-DS-V5-HG	Deck	4-9/16" (116 mm) Cast spout	B-0199-09-N05 VR 0.5 GPM/1.9 LPM	N	Low flow hydrogenerator
5EF-1D-DS-V5THG	Deck	4-9/16" (116 mm) Cast spout	B-0199-09-N05 VR 0.5 GPM/1.9 LPM	N	Thermostatic mixing valve; Low flow hydrogenerator
5EF-1D-DS-VF05	Deck	4-9/16" (116 mm) Cast spout	B-0199-09-N05 VR 0.5 GPM/1.9 LPM	N	



5EF-2D-DS Series Electronic Faucet

- 4" centerset deck mount sensor faucet
- Cast spout with 2.2 GPM/8.3 LPM vandal-resistant aerator
- AC or DC powered control module
- Temperature control mixing valve



5EF-2D-DS

MODEL	Wall or Deck Mount	Gooseneck	Aerator / GPM / LPM	Supply Nipple	Notes
5EF-2D-DS Models					
5EF-2D-DS	Deck	5-3/16" Cast spout	B-0199-09 VR 2.2 GPM/8.3 LPM	N	Short el
5EF-2D-DS-TMV	Deck	5-3/16" Cast spout	B-0199-09 VR 2.2 GPM/8.3 LPM	N	Thermostatic mixing valve
5EF-2D-DS-VF05	Deck	5-3/16" Cast spout	B-0199-09-N05 VR 0.5 GPM/1.9 GPM	N	
5EF-2D-DS-V5-HG	Deck	5-3/16" Cast spout	B-0199-09-N05 VR 0.5 GPM/1.9 GPM	N	Low flow hydrogenerator
5EF-2D-DS-V5THG	Deck	5-3/16" Cast spout	B-0199-09-N05 VR 0.5 GPM/1.9 GPM	N	Thermostatic mixing valve; Low flow hydrogenerator
5EF-2D-DS-WS	Deck	5-3/16" Cast spout	B-0199-09-WS VR 1.5 GPM/5.7 LPM	N	

Electronic Faucets Replacement Parts

- 5EF-0001 Control module
- 5EF-0002 AC transformer
- 5EF-0003 Flat lens and sensor wire assembly
- 5EF-0004 Convex lens and sensor wire assembly
- 5EF-0005 Flexible supply hose for 3/8" compression stops
- 5EF-0006 Electronic faucet mixing valve
- 5EF-FILTER Electronic faucet control module filter
- 5EF-TMV Thermostatic mixing valve with 1/2" NPSM male fittings



**5EF-0001
Control Module**

See p. 3 for spec for 5EF-0001

4" Deck Mount Pre-Rinse Units

- 4" deck mount mixing faucet
- In-line check valves
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- ½" NPT eccentric flanged female inlets
- 44" flex hose with overhead spring
- 5SV 1.15 GPM/4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket



5PR-4D00



5PR-4D12

MODEL	Spray Valve GPM / LPM	Add-On Faucet	Nozzle Length / Outlet	Supply Nipples	Notes
4" Deck Mount Faucet Models					
5PR-4D00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-4D08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	
5PR-4D12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-4DLS00	5SV (1.15 GPM/ 4.35 LPM)	N	—	Y	Includes supply nipple kit B-0425-M
5PR-4DLS08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	Y	Includes supply nipple kit B-0425-M

Single Hole Deck Mount Pre-Rinse Units

- Single hole deck mount mixing faucet
- 1/2" BSPP in-line check valves
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- 18" (457 mm) flexible supply hoses
- 44" (1118 mm) flex hose with overhead spring
- 5SV 1.15 GPM/4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket



5PR-2S00



5PR-2S12

MODEL	Spray Valve GPM/LPM	Add-On Faucet	Nozzle Length/ Outlet	Supply Nipples	Notes
Single Hole Dual Temp Models					
5PR-2S00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-2S00-PQ6	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	Case Pack of 6
5PR-2S00-C	5SV-C (1.2 GPM/ 4.54 LPM)	N	—	N	
5PR-2S00-12WB	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	12" (305 mm) Wall Bracket
5PR-2S06	5SV (1.15 GPM/ 4.35 LPM)	Y	6" (152 mm) with Laminar flow	N	
5PR-2S08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	
5PR-2S10	5SV (1.15 GPM/ 4.35 LPM)	Y	10" (254 mm) with Laminar flow	N	
5PR-2S12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-2S12-C	5SV-C (1.2 GPM/ 4.54 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-2S12-12WB	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	12" (305 mm) Wall Bracket
5PR-2S12V15	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-2S14	5SV (1.15 GPM/ 4.35 LPM)	Y	14" (356 mm) with Laminar flow	N	

8" Wall Mount Pre-Rinse Units

- 8" (206 mm) wall mount mixing faucet
- In-line check valves
- ½" NPT female inlets
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- 44" (1118 mm) flex hose with overhead spring
- 5SV 1.15 GPM / 4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket



5PR-8W00



5PR-8W12

MODEL	Spray Valve GPM/LPM	Add-On Faucet	Nozzle Length / Outlet	Supply Nipples	Notes
8" Wall Mount Pre-Rinse Models					
5PR-8W00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-8W00-C	5SV-C (1.2 GPM/ 4.5 LPM)	N	—	N	
5PR-8W06	5SV (1.15 GPM/ 4.35 LPM)	Y	6" (152 mm) with Laminar flow	N	
5PR-8W08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	
5PR-8W10	5SV (1.15 GPM/ 4.35 LPM)	Y	10" (254 mm) with Laminar flow	N	
5PR-8W12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-8W12-C	5SV-C (1.2 GPM/ 4.5 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-8W14	5SV (1.15 GPM/ 4.35 LPM)	Y	14" (356 mm) with Laminar flow	N	
5PR-8W14-C	5SV-C (1.2 GPM/ 4.5 LPM)	Y	14" (356 mm) with Laminar flow	N	
5PR-8W18	5SV (1.15 GPM/ 4.35 LPM)	Y	18" (457 mm) with Laminar flow	N	
5PR-8WLS00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-8WLS12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-8WLZ00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-8WLZ00-PQ6	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	Case Pack of 6
5PR-8WLZ12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-8WLZ12-PQ6	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	Case Pack of 6
5PR-8WWS00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-8WWS12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	

8" Deck Mount Pre-Rinse Units

- 8" (206 mm) deck mount mixing faucet
- In-line check valves
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- ½" NPT female inlets
- 44" (1118 mm) flex hose with overhead spring
- 5SV 1.15 GPM / 4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket

Note: ½" NPT supply nipple kit (B-0425-M) sold separately

MODEL	Spray Valve GPM/LPM	Add-On Faucet	Nozzle Length / Outlet	Supply Nipples	Notes
8" Deck Mount Pre-Rinse Models					
5PR-8D00	5SV (1.15 GPM/4.35 LPM)	N	—	N	
5PR-8D06	5SV (1.15 GPM/4.35 LPM)	Y	6" (152 mm) with Laminar flow	N	
5PR-8D08	5SV (1.15 GPM/4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	
5PR-8D10	5SV (1.15 GPM/4.35 LPM)	Y	10" (254 mm) with Laminar flow	N	
5PR-8D12	5SV (1.15 GPM/4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-8D14	5SV (1.15 GPM/4.35 LPM)	Y	14" (356 mm) with Laminar flow	N	



5PR-8D00



5PR-8D12

Single Supply Deck Mount Pre-Rinse Units

- Single hole, single temperature deck mount faucet
- Quarter-turn ceramic cartridge with lever handle and color coded screw
- ½" NPSM female inlet
- 44" (1118 mm) flex hose with overhead spring
- 5SV 1.15 GPM / 4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket



5PR-1S00



5PR-1S12

MODEL	Spray Valve GPM/LPM	Add-On Faucet	Nozzle Length/ Outlet	Supply Nipples	Notes
Single Hole Single Temp Pre-Rinse Models					
5PR-1S00	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	
5PR-1S06	5SV (1.15 GPM/ 4.35 LPM)	Y	6" (152 mm) with Laminar flow	N	
5PR-1S08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	
5PR-1S10	5SV (1.15 GPM/ 4.35 LPM)	Y	10" (254 mm) with Laminar flow	N	
5PR-1S12	5SV (1.15 GPM/ 4.35 LPM)	Y	12" (305 mm) with Laminar flow	N	
5PR-1S14	5SV (1.15 GPM/ 4.35 LPM)	Y	14" (356 mm) with Laminar flow	N	
5PR-1S18	5SV (1.15 GPM/ 4.35 LPM)	Y	18" (457 mm) with Laminar flow	N	
5PR-2500-PQ6	5SV (1.15 GPM/ 4.35 LPM)	N	—	N	Case Pack of 6

Single Hole Low Profile Pre-Rinse Units

- Single hole deck mount mixing faucet
- ½" BSPP In-line check valves
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- Add-on faucet with swing nozzle
- 18" (457 mm) flexible supply hoses
- 24" (610 mm) flex hose with compact overhead spring
- 5SV 1.15 GPM / 4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket



5MPH-2DLN-08

8" Wall Mount Low Profile Pre-Rinse Units

- 8" (206 mm) wall mount mixing faucet
- In-line check valves
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- Add-on faucet with swing nozzle
- 24" (610 mm) flex hose with compact overhead spring
- 5SV 1.15 GPM / 4.35 LPM spray valve
- Includes 6" (152 mm) wall bracket



5MPH-8WLN-06

MODEL	Spray Valve GPM/LPM	Add-On Faucet	Nozzle Length / Outlet	Supply Nipples	Notes
Single Hole Deck Mount Low Profile Pre-Rinse Models					
5MPH-2SLN-06	5SV (1.15 GPM/ 4.35 LPM)	Y	6" (152 mm) with Laminar flow	N	
5MPH-2SLN-08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	
8" Wall Mount Low Profile Pre-Rinse Models					
5MPH-8WLN-06	5SV (1.15 GPM/ 4.35 LPM)	Y	6" (152 mm) with Laminar flow	N	
5MPH-8WLN-08	5SV (1.15 GPM/ 4.35 LPM)	Y	8" (206 mm) with Laminar flow	N	

Single Supply Deck Mount Faucets

- Single hole, single temperature deck mount faucet
- Converts to rigid from swivel with included lock washer (014200-45)
- Quarter-turn ceramic cartridge with lever handle and color coded screw
- 1/2" NPSM male inlet



MODEL	Swing Nozzle/ Goosneck	Aerator GPM / LPM	Supply Nipple	Notes
Single Supply Deck Mount Faucet Models				
5F-1SLX00	—	—	N	Less swing nozzle
5F-1SLX03	3" (76 mm) Rigid goosneck	Laminar flow	N	
5F-1SLX05	5-1/2" (141 mm) Rigid/Swivel goosneck	Laminar flow	N	See photo, left
5F-1SLX05A	5-1/2" (141 mm) Rigid/Swivel goosneck	2.2 GPM/ 8.3 LPM Aerator	N	
5F-1SLX05CA	5-7/8" (149 mm) Rigid/Swivel goosneck	2.2 GPM/ 8.3 LPM Aerator	N	
5F-1SLX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-1SLX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-1SLX08A	8" (206 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	N	
5F-1SLX10	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-1SLX10A	10" (254 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	N	
5F-1SLX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left
5F-1SLX12A	12" (305 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	N	
5F-1SLX14	14" (356 mm) Swing nozzle	Laminar flow	N	
5F-1SLX18	18" (457 mm) Swing nozzle	Laminar flow	N	

Certified to NSF/ANSI 61/9

Single Supply Wall Mount Faucets

- Single hole, single temperature wall mount faucet
- 5-9/16" (142 mm) swivel goosneck with laminar flow device
- Quarter-turn ceramic cartridge with lever handle and color coded screw
- 1/2" NPT female inlet

Note: Converts to rigid from swivel with lock washer (014200-45) sold separately



MODEL	Swing Nozzle/ Goosneck	Aerator/GPM	Supply Nipple	Notes
Single Supply Wall Mount Faucet Models				
5F-1WLX05	5-9/16" (142 mm) Rigid/ Swivel goosneck	Laminar flow	N	See photo, left
5F-1WLX00	—	—	N	Less nozzle
5F-1WLX18DJ	18" Double Joint Swing Nozzle	Laminar flow	N	

Certified to NSF/ANSI 61/9

4" Deck Mount Workboard Faucets

- 4" (102 mm) deck mount mixing faucet
- Quarter-turn ceramic cartridges with lever handles with color coded screws

Note: Converts to rigid with (014200-45) lock washer (sold separately)



MODEL	Swing Nozzle/ Goosneck	Aerator GPM / LPM	Supply Nipple	Notes
4" Deck Mount Workboard Faucet Models				
5F-4CLX00	—	—	N	Less swing nozzle
5F-4CLX03A	3" (76 mm) Swivel goosneck	2.2 GPM/8.3 LPM Aerator	N	
5F-4CLX05	5-1/2" (141 mm) Swivel goosneck	Laminar flow	N	See photo, left
5F-4CLX06	6" (152 mm) Swivel goosneck	Laminar flow	N	
5F-4CLX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-4CLX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-4CLX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left

Certified to NSF/ANSI 61/9

4" Deck Mount Workboard Faucets

- 4" (102 mm) deck mount mixing faucet
- Quarter-turn ceramic cartridges with 4" (102 mm) wrist- action handles and color coded screws

Note: Converts to rigid with (014200-45) lock washer (sold separately)



MODEL	Swing Nozzle/ Goosneck	Aerator/GPM	Supply Nipple	Notes
4" Deck Mount Workboard Faucets with Wrist-Action Handles				
5F-4CW00	—	—	N	Less swing nozzle
5F-4CW03A	3" (76 mm) Swivel goosneck	2.2 GPM/ 8.3 LPM Aerator	N	See photo, left
5F-4CW05	5-1/2" (141 mm) Swivel goosneck	Laminar flow	N	
5F-4CW05A	5-1/2" Swivel goosneck	2.2 GPM/ 8.3 LPM Aerator	N	
5F-4CW06	6" (152 mm) Swivel goosneck	Laminar flow	N	
5F-4CW08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-4CW10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-4CW12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left

Certified to NSF/ANSI 61/9

4" Deck Mount Faucets

- 4" (102 mm) deck mount mixing faucet
- Ceramic cartridges with lever handles with color coded screws
- ½" NPT female inlets

Note: Converts to rigid with (014200-45) lock washer (sold separately)



5F-4DLX12



5F-4DLX05



B-0425-M



MODEL	Swing Nozzle/ Gooseneck	Aerator GPM / LPM	Supply Nipple	Notes
4" Deck Mount Faucet Models				
5F-4DLX00	—	—	N	Less swing nozzle
5F-4DLX03	3" (76 mm) Rigid gooseneck	Laminar flow	N	
5F-4DLX05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	N	See photo, left
5F-4DLX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-4DLX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-4DLX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-4DLX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left
5F-4DLX14	14" (356 mm) Swing nozzle	Laminar flow	N	
4" Deck Mount Faucets with Inlet Supply Kits				
5F-4DLS00	—	—	Y	Less swing nozzle
5F-4DLS03	3" (76 mm) Rigid gooseneck	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS05A	5-1/2" (141 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS05CA	5-7/8" (149 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS06	6" (152 mm) Swing nozzle	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS08	8" (206 mm) Swing nozzle	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS08A	8" (206 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS09	9" (229 mm) Swivel gooseneck	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS10	10" (254 mm) Swing nozzle	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS10A	10" (254 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS12	12" (305 mm) Swing nozzle	Laminar flow	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS12A	12" (305 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes inlet supply kit (B-0425-M)
5F-4DLS14	14" (356 mm) Swing nozzle	Laminar flow	Y	Includes inlet supply kit (B-0425-M)

Certified to NSF/ANSI 61/9

4" Deck Mount Faucets with Wrist-Action Handles

- 4" (102 mm) deck mount mixing faucet
- Quarter-turn ceramic cartridges with 4" (102 mm) wrist-action handles and color coded screws

Note: Converts to rigid with (014200-45) lock washer (sold separately)



5F-4DWX12



B-0425-M



5F-4DWS09



MODEL	Swing Nozzle/ Gooseneck	Aerator GPM / LPM	Supply Nipple	Notes
4" Deck Mount Faucets with Wrist-Action Handles				
5F-4DWX00	—	—	N	Less swing nozzle
5F-4DWX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-4DWX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-4DWX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left
4" Deck Mount Faucets with Wrist-Action Handles and Inlet Supply Kits				
5F-4DWS00	—	—	Y	Less swing nozzle; includes supply kit (B-0425-M)
5F-4DWS03	3" (76 mm) Rigid gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS06	6" (152 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS08	8" (206 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS09	9" (229 mm) Swivel gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS10	10" (254 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS12	12" (305 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-4DWS14	14" (356 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)

Certified to NSF/ANSI 61/9

Single Hole Deck Mount Faucets

- Single hole deck mount faucet
- Ceramic cartridge with lever handles with color coded screws
- 18" (457 mm) flexible supply hoses with compression fittings for 5/8" O.D. copper tubing
- Remove compression nut for 1/2" NPSM male inlet

Note: Converts to rigid with (014200-45) lock washer (sold separately)



MODEL	Swing Nozzle/ Gooseneck	Aerator GPM / LPM	Notes
Single Hole Deck Mount Faucet Models			
5F-2SLX00	—	—	Less swing nozzle
5F-2SLX03	3" (76 mm) Rigid gooseneck	Laminar flow	
5F-2SLX05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	See photo, left
5F-2SLX05A	5-1/2" (141 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	
5F-2SLX05CA	5-7/8" (149 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	
5F-2SLX06	6" (152 mm) Swing nozzle	Laminar flow	
5F-2SLX08	8" (206 mm) Swing nozzle	Laminar flow	
5F-2SLX08A	8" (206 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	
5F-2SLX10	10" (254 mm) Swing nozzle	Laminar flow	
5F-2SLX10A	10" (254 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	
5F-2SLX-VF05	10" (254 mm) Swing nozzle	0.5 GPM/ 1.89 LPM Non- Aerated	Vandal Resistant
5F-2SLX12	12" (305 mm) Swing nozzle	Laminar flow	See photo, left
5F-2SLX12A	12" (305 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	
5F-2SLX12-VF05	12 1/8" (308 mm) Swing nozzle	0.5 GPM/ 1.89 LPM Non- Aerated	Vandal Resistant
5F-2SLX14	14" (356 mm) Swing nozzle	Laminar flow	
5F-2SLX18	18" (457 mm) Swing nozzle	Laminar flow	

Certified to NSF/ANSI 61/9



4" Wall Mount Workboard Faucets

- 4" (102 mm) wall mount mixing faucet
- Quarter-turn ceramic cartridges with lever handles and color coded screws
- 1/2" NPT male inlets

Note: Converts to rigid with (014200-45) lock washer (sold separately)



5F-4WLX12



5F-4WLX03

MODEL	Swing Nozzle/ Gooseneck	Aerator GPM / LPM	Supply Nipple	Notes
4" Deck Mount Workboard Faucet Models				
5F-4WLX00	—	—	N	Less swing nozzle
5F-4WLX03	3" (76 mm) Swivel gooseneck	Laminar flow	N	See photo, left
5F-4WLX03-VF05	3" (76 mm) Swivel gooseneck	0.5 GPM/1.9 LPM VR Non-aerated outlet device	N	
5F-4WLX05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	N	
5F-4WLX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-4WLX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-4WLX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-4WLX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left

Certified to NSF/ANSI 61/9

4" Wall Mount Workboard Faucets with Wrist-Action Handles

- 4" (102 mm) wall mount mixing faucet
- Quarter-turn ceramic cartridges with wrist-action handles and color coded screws
- 1/2" NPT male inlets

Note: Converts to rigid with (014200-45) lock washer (sold separately)



MODEL	Swing Nozzle/ Gooseneck	Aerator GPM / LPM	Supply Nipple	Notes
4" Deck Mount Workboard Faucets with Wrist-Action Handles				
5F-4WWX00	—	—	N	Less swing nozzle
5F-4WWX03	3" (76 mm) Swivel gooseneck	Laminar flow	N	See photo, left
5F-4WWX05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	N	See photo, left
5F-4WWX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-4WWX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-4WWX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-4WWX12	12" (305 mm) Swing nozzle	Laminar flow	N	

Certified to NSF/ANSI 61/9



5F-4WWX05

5F-4WWX03

8" Wall Mount Faucets

- 8" (206 mm) wall mount mixing faucet
- Quarter-turn ceramic cartridges with lever handles with color coded screws
- 1/2" NPT female inlets

Note: Converts to rigid with (014200-45) lock washer (sold separately)



5F-8WLX12



B-0230-K



5F-8WLX05

8" Wall Mount Faucets

- 8" (206 mm) wall mount mixing faucet
- 1/2" BSPP male inlets
- Swivel gooseneck or swing nozzle with laminar flow device
- Quarter-turn ceramic cartridge with lever handle and color coded screw



5F-8WLB12



5F-8WWB12



MODEL	Swing Nozzle/ Goosneck	Aerator GPM / LPM	Supply Nipple	Notes
8" Wall Mount Faucet Models				
5F-8WLX00	—	—	N	Less swing nozzle
5F-8WLX00-EE	—	—	N	Less swing nozzle; 00EE inlets
5F-8WLX03	3" (76 mm) Rigid gooseneck	Laminar flow	N	
5F-8WLX05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	N	See photo, left
5F-8WLX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-8WLX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-8WLX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-8WLX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left
5F-8WLX12-VF05	12" (305 mm) Swing nozzle	0.5 GPM/ 1.89 LPM	N	Vandal Resistant
5F-8WLX14	14" (356 mm) Swing nozzle	Laminar flow	N	
5F-8WLX16	16" (406 mm) Swing nozzle	Laminar flow	N	
5F-8WLX18	18" (457 mm) Swing nozzle	Laminar flow	N	
8" (206 mm) Wall Mount Faucets with Supply Elbow Kit				
5F-8WLS00	—	—	Y	Less swing nozzle; includes supply elbow kit (B-0230-K)
5F-8WLS06	6" (152 mm) Swing nozzle	Laminar flow	Y	Includes supply elbow kit (B-0230-K)
5F-8WLS10	10" (254 mm) Swing nozzle	Laminar flow	Y	Includes supply elbow kit (B-0230-K)
5F-8WLS12	12" Swing nozzle	Laminar flow	Y	Includes supply elbow kit (B-0230-K)

Certified to NSF/ANSI 61/9



MODEL	Swing Nozzle/ Goosneck	Aerator GPM / LPM	1/2" BSPP Male Supply Nipple	Notes
8" Wall Mount Faucets with 1/2" BSPP Male Inlets				
5F-8WLB00	—	—	Y	
5F-8WLB05	5" (141 mm) Swivel gooseneck	Laminar flow	Y	
5F-8WLB06	6" (152 mm) Swing nozzle	Laminar flow	Y	
5F-8WLB12	12" (305 mm) Swing nozzle	Laminar flow	Y	See illus., right
5F-8WWB00	—	—	Y	Wrist action handle
5F-8WWB05	5" (141 mm) Swivel gooseneck	Laminar flow	Y	Wrist action handle
5F-8WWB06	6" (152 mm) Swing nozzle	Laminar flow	Y	Wrist action handle
5F-8WWB08	8" (206 mm) Swing nozzle	Laminar flow	Y	Wrist action handle
5F-8WWB12	12" (305 mm) Swing nozzle	Laminar flow	Y	Wrist action handle

Certified to NSF/ANSI 61/9


8" Wall Mount Faucets

- 8" (206 mm) wall mount mixing faucet
- Ceramic cartridges with 4" (102 mm) wrist-action handles with color coded screws
- ½" NPT female inlets

Note: Converts to rigid with (014200-45) lock washer (sold separately)



5F-8WWX00



B-0230-K



5F-8WWS12

8" Deck Mount Workboard Faucets

- 8" (206 mm) deck mount mixing faucet
- Ceramic cartridges with lever handles with color coded screws
- ½" NPT eccentric flanged female inlets
- ½" NPT male elbow kit (B-0230-K) sold separately

Note: Converts to rigid with (014200-45) lock washer (sold separately)



5F-8CLX08

8" Deck Mount Workboard Faucets with Wrist-Action Handles

- 8" (206 mm) deck mount mixing faucet
- Ceramic cartridges with 4" wrist-action handles with color coded screws
- ½" NPT eccentric flanged female inlets
- ½" NPT male elbow kit (B-0230-K) sold separately

Note: Converts to rigid with (014200-45) lock washer (sold separately)



MODEL	Swing Nozzle / Goosneck	Aerator GPM / LPM	Supply Nipple	Notes
8" Wall Mount Faucets with Wrist-Action Handles				
5F-8WWX00	—	—	N	Less swing nozzle
8" Wall Mount Faucets with Supply Elbow Kits				
5F-8WWS06	6" (152 mm) Swing nozzle	Laminar flow	Y	Includes supply elbow kit (B-0230-K)
5F-8WWS12	12" (305 mm) Swing nozzle	Laminar flow	Y	Includes supply elbow kit (B-0230-K)

Certified to NSF/ANSI 61/9



MODEL	Swing Nozzle / Goosneck	Aerator GPM / LPM	Supply Nipple	Notes
8" Deck Mount Workboard Faucet Models				
5F-8CLX00	—	—	N	Less swing nozzle
5F-8CLX05	5-1/2" (141 mm) Swivel goosneck	Laminar flow	N	
5F-8CLX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-8CLX08	8" (206 mm) Swing nozzle	Laminar flow	N	See photo, left
5F-8CLX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-8CLX12	12" (305 mm) Swing nozzle	Laminar flow	N	

Certified to NSF/ANSI 61/9



MODEL	Swing Nozzle / Goosneck	Aerator GPM / LPM	Supply Nipple	Notes
8" Deck Mount Workboard Faucet Models with Wrist-Action Handles				
5F-8CWX00	—	—	N	Less swing nozzle
5F-8CWX05	5-1/2" (141 mm) Swivel goosneck	Laminar flow	N	
5F-8CWX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-8CWX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-8CWX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-8CWX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, below

Certified to NSF/ANSI 61/9



5F-8CWX12

8" Deck Mount Faucets

- 8" (206 mm) deck mount mixing faucet
- Quarter-turn ceramic cartridges with lever handles with color coded screws
- 1/2" NPT female inlets

Note: Convert to rigid from swivel with lock washer (014200-45) sold separately



5F-8DLX12



5F-8DLX05



B-0425-M



MODEL	Swing Nozzle / Gooseneck	Aerator GPM / LPM	Supply Nipple	Notes
8" Deck Mount Faucet Models				
5F-8DLX00	—	—	N	Less swing nozzle
5F-8DLX03	3" (76 mm) Rigid gooseneck	Laminar flow	N	
5F-8DLX05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	N	See photo, left
5F-8DLX06	6" (152 mm) Swing nozzle	Laminar flow	N	
5F-8DLX08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-8DLX10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-8DLX10-VF05	10" (254 mm) Swing nozzle	0.5 GPM/ 1.89 LPM	N	Vandal Resistant
5F-8DLX12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left
5F-8DLX12-VF05	12" (305 mm) Swing nozzle	0.5 GPM/ 1.89 LPM	N	Vandal Resistant
5F-8DLX14	14" (354 mm) Swing nozzle	Laminar flow	N	
5F-8DLX16	16" (406 mm) Swing nozzle	Laminar flow	N	
5F-8DLX18	18" (457 mm) Swing nozzle	Laminar flow	N	
8" Deck Mount Faucets with Inlet Supply Kits				
5F-8DLS00	—	—	Y	Less swing nozzle; includes supply kit (B-0425-M)
5F-8DLS03	3" (76 mm) Rigid gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS05A	5-1/2" (141 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DLS05CA	5-7/8" (149 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DLS06	6" (152 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS08	8" (203 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS08A	8" (203 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DLS09	9" (229 mm) Swivel gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS10	10" (254 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS10A	10" (254 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DLS12	12" (305 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DLS12A	12" (305 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DLS14	14" (356 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)

Certified to NSF/ANSI 61/9



8" Deck Mount Faucets

- 8" (203 mm) deck mount mixing faucet
- Quarter-turn ceramic cartridges with 4" (102 mm) wrist-action handles with color coded screws
- ½" NPT female inlets

Note: Convert to rigid from swivel with lock washer (014200-45) sold separately



5F-8DWS12



B-0425-M

MODEL	Swing Nozzle / Gooseneck	Aerator GPM / LPM	Supply Nipple	Notes
8" Deck Mount Faucets with Wrist-Action Handles				
5F-8DWS00	—	—	N	Less swing nozzle
5F-8DWS08	8" (206 mm) Swing nozzle	Laminar flow	N	
5F-8DWS10	10" (254 mm) Swing nozzle	Laminar flow	N	
5F-8DWS12	12" (305 mm) Swing nozzle	Laminar flow	N	See photo, left
8" Deck Mount Faucets with Wrist-Action Handles and Inlet Supply Kits				
5F-8DWS00	—	—	Y	Less swing nozzle
5F-8DWS03	3" (76 mm) Rigid gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS05	5-1/2" (141 mm) Swivel gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS05A	5-1/2" (141 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DWS05CA	5-7/8" (149 mm) Swivel gooseneck	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DWS06	6" (152 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS08	8" (206 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS08A	8" (206 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DWS09	9" (229 mm) Swivel gooseneck	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS10	10" (254 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS10A	10" (254 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DWS12	12" (305 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)
5F-8DWS12A	12" (305 mm) Swing nozzle	2.2 GPM/ 8.3 LPM Aerator	Y	Includes supply kit (B-0425-M)
5F-8DWS14	14" (356 mm) Swing nozzle	Laminar flow	Y	Includes supply kit (B-0425-M)

Certified to NSF/ANSI 61/9

5SL-1000 4" Centerset Single Lever Faucet

- 4" (102 mm) centers
- 1/2" NPSM inlets with 3/8" O.D. flexible copper tubing
- 2.0 GPM / 7.6 LPM aerator
- Single lever cartridge replacement – (015232-45)



5SL-1000

5GF-W-F Wall Mount Glass Filler

- Push back arm design
- 3/8" NPT female inlet
- 2" (51 mm) diameter adjustable slip flange
- Blue self-closing Lexan arm
- Blue Lexan outlet
- Volume control adjustable with screwdriver



5GF-W-F

5GF-W Wall Mount Glass Filler

- Push back arm design
- 3/8" NPT male inlet
- Blue self-closing Lexan arm
- Blue Lexan outlet
- Volume control adjustable with screwdriver



5GF-W

5GF-8P Pedestal Deck Mount Glass Filler

- 8" (206 mm) pedestal height (from deck to outlet)
- Push back design
- 1/2" NPT male inlet
- 2" (51 mm) diameter adjustable flange
- Blue self-closing Lexan arm
- Blue Lexan outlet
- Volume control adjustable with screwdriver



5GF-8P

5GF-8P-WS Glass Filler Water Station

- 8" pedestal glass filler with retro design
- Push back design
- 18 gauge stainless steel drip pan
- 1 1/4" drain
- 1/2" NPT male inlet
- 2" (51 mm) diameter adjustable flange
- Blue self-closing Lexan arm
- Blue Lexan outlet
- Volume control adjustable with screwdriver
- Stainless steel screws for mounting included
- Suggested drip pan cut-out: 10 1/2" x 5" (267 mm x 127 mm)

5GF-12P Pedestal Deck-Mount Glass Filler

- Same as 5GF-8P except with 12" (305 mm) pedestal height

5GF-16P Pedestal Deck-Mount Glass Filler

- Same as 5GF-8P except with 16" (406 mm) pedestal height

5GF-RK Glass Filler Repair Kit (not shown)

Replacement parts kit includes:


- (2) Springs
- (1) Handle screw
- (1) Handle nut
- (2) Seat washers
- (2) 'O'-rings
- (2) Bonnet washers
- (2) Stem packings
- (2) Outlet washers
- (1) Outlet tip
- (1) Lever arm
- (1) Silicon grease tube



5GF-8P-WS

Stainless Steel Heavy Duty Dual Arm Open Reels

FEATURES:

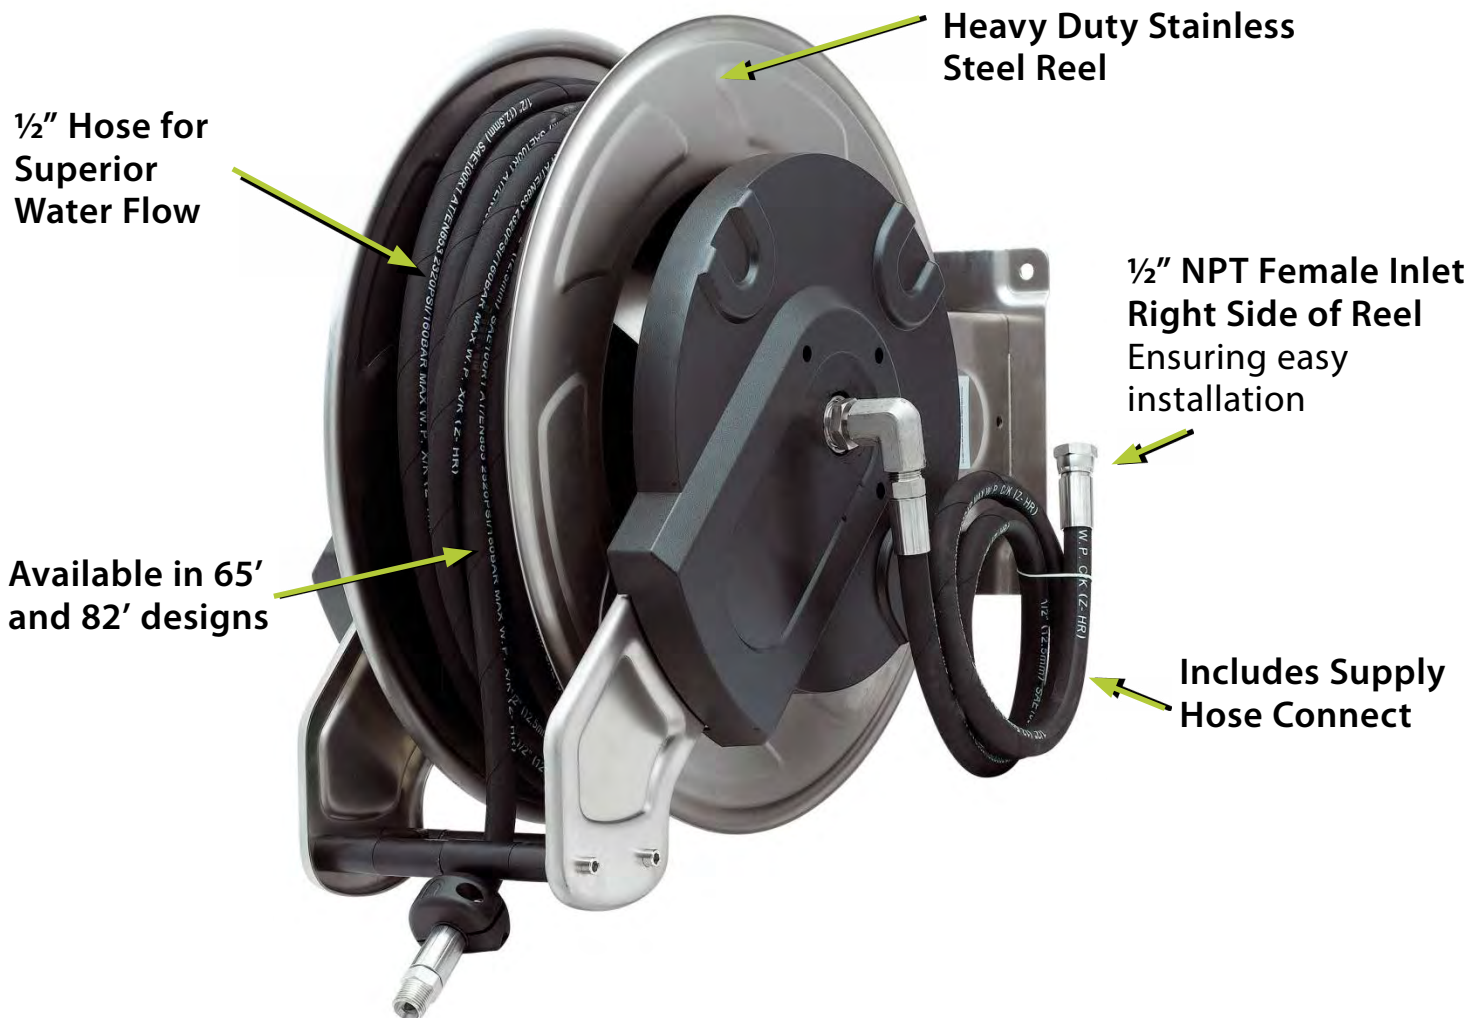

Available with 5SV-WH Spray Valve and EMV-0522-24 Front Trigger Water Gun:

5SV-WH Spray Valve, Handle and Ring

- Same as 5SV-H spray valve except includes handle and ring
- 2019 DOE Non-compliant



EMV-0522-24 Front Trigger Water Gun

- Brass body with blue rubber cover
- 1/2" NPST female inlet
- 3/8" (9mm) orifice



5HR-351 and 5HR-361 Open Hose Reels

- Stainless steel
- 65' (19.8 m) and 82' (25 m) hose lengths
- 1/2" hose
- Hose is rated at 300 PSI with a maximum temperature of 140°F
- 1/2" NPT male outlet on hose
- 1/2" NPSM with bullnose female inlet



**5HR-351 and
5HR-361**

Hose Reel Model Options

5HR-351 Models	
• 5HR-351	Hose Reel with 65' (19.8 m) hose length
• 5HR-351-01	Includes 5SV-WH Spray Valve
• 5HR-351-01-ESB	Includes Stainless Steel Swing Bracket
• 5HR-351-12	Includes EMV-0522-24 Front Trigger Water Gun
• 5HR-351-12-ESB	Includes Stainless Steel Swing Bracket
5HR-361 Models	
• 5HR-361	Hose Reel with 82' (25 m) hose length
• 5HR-361-01	Includes 5SV-WH Spray Valve
• 5HR-361-01-ESB	Includes Stainless Steel Swing Bracket
• 5HR-361-12	Includes EMV-0522-24 Front Trigger Water Gun
• 5HR-361-12-ESB	Includes Stainless Steel Swing Bracket



**5HR-351-01 and
5HR-361-01**



**5HR-351-12 and
5HR-361-12**



021131-45 Stainless Steel Swing Bracket Designed for 1/2" Heavy Duty Hose Reels

- Stainless steel wall mount swing bracket
- 100° rotation
- Designed for one person installation
- Fits equip stainless steel 1/2" hose reels
- Includes reel-to-bracket mounting hardware
- Includes safety c-clips to secure hose reel after installation
- Positive stops built in to bracket to keep hose reel from hitting or damaging wall

Equip 5HR-232, 5HR-242 and 5HR-342 Open Hose Reels

FEATURES:

Reel and Base

- Powder coated steel
- Thick steel structure
- Extra ribs for strength



Guide Arm

- 4-position orientation
- Mounted independently
- Easily adjustable
- Thick steel structure
- Extra ribs for strength

Adjustable Hose Stop

Hose

- Reinforced wear-resistant black cover
- 35' and 50' hose lengths
- 300 PSI max.
- 176°F maximum temperature

Heavy-Duty Brass Swivel

- Outboard of reel
- 3/8" NPT female inlet
- Easy 'O'-Ring service
- 'O'-Ring: Buna-N nitrile and two nylon wearing rings

Main Spring

- Proprietary spring alloy
- Exceeds 25K pull cycle test
- Easy and safe service

5SV-H High Flow Spray Valve

- For washdown applications; not intended for use with pre-rinse units (does not include handle)
- Add "-01" to models to include spray valve with handle
- 3/4-14 inlet
- EPA 2005 Non-compliant
- Also available:



- | | |
|----------|-----------------------------------|
| 5SV-H-RK | Sprayface repair kit |
| 5SV-WH | High flow spray valve with handle |

Equip Open Hose Reels

- $\frac{3}{8}$ " and $\frac{1}{2}$ " NPT connections
- Optional spray valve models available
- Replacement parts

5HR-232, 5HR-242 and 5HR-342

Open Hose Reels

- Black epoxy coated steel
- 35' (10 m) and 50' (15 m) hose lengths
- $\frac{3}{8}$ " I.D. hose
- Hose is rated at 300 PSI with a maximum temperature of 176°F
- $\frac{3}{8}$ " NPT male outlet on hose
- $\frac{3}{8}$ " NPT female inlet in reel

Hose Reel Model Options

5HR-232 Models

• 5HR-232	Hose Reel with 35' (10 m) hose length
• 5HR-232-A	Includes Reducing Adapter, less Spray Valve/Water Gun
• 5HR-232-01	Includes 5SV-WH Spray Valve
• 5HR-232-01-ESB	Includes Stainless Steel Swing Bracket
• 5HR-232-01-A	Includes Reducing Adapter and 5SV-H High Flow Spray Valve
• 5HR-232-12	Includes EMV-0522-24 Front Trigger Water Gun
• 5HR-232-12-ESB	Includes Stainless Steel Swing Bracket
• 5HR-232-12-A	Includes Reducing Adapter and EMV-0522-24 Front Trigger Water Gun
• 5HR-232-GH	Includes 3' (1 m) $\frac{3}{8}$ " NPT male x $\frac{3}{4}$ " garden hose female connector hose
• 5HR-232-01-GH	Includes 5SV-WH Spray Valve and 3' (1 m) $\frac{3}{8}$ " NPT male x $\frac{3}{4}$ " garden hose female connector hose

5HR-242 Models

5HR-242 Models

• 5HR-242	Hose Reel with 50' (15 m) hose length
• 5HR-242-A	Includes Reducing Adapter, less Spray Valve/Water Gun
• 5HR-242-01	Includes 5SV-WH Spray Valve
• 5HR-242-01-ESB	Includes Stainless Steel Swing Bracket
• 5HR-242-01-A	Includes Reducing Adapter and 5SV-H High Flow Spray Valve
• 5HR-242-12	Includes EMV-0522-24 Front Trigger Water Gun
• 5HR-242-12-ESB	Includes Stainless Steel Swing Bracket
• 5HR-242-12-A	Includes Reducing Adapter and EMV-0522-24 Front Trigger Water Gun
• 5HR-242-GH	Includes 3' (1 m) $\frac{3}{8}$ " NPT male x $\frac{3}{4}$ " garden hose female connector hose
• 5HR-242-01-GH	Includes 5SV-WH Spray Valve and 3' (1 m) $\frac{3}{8}$ " NPT male x $\frac{3}{4}$ " garden hose female connector hose

5HR-342 Models

5HR-342 Models

• 5HR-342-01-GH	$\frac{1}{2}$ " x 50' (15 m) Hose with 5SV-WH Spray Valve and 3' (1 m) $\frac{1}{2}$ " NPT male x $\frac{3}{4}$ " garden hose female connector hose
• 5HR-342-GH	$\frac{1}{2}$ " x 50' (15 m) Hose with 3' (1 m) $\frac{1}{2}$ " NPT male x $\frac{3}{4}$ " garden hose female connector hose



5HR-232,
5HR-242
and
5HR-342



5HR-232-12



5HR-342-01-GH

Equip 5HR-222 Hose Reel Models with 25' Hose

5HR-222

Open Hose Reels

- Black powder coated steel
- $\frac{3}{8}$ " x 25' (8 m) hose (5HR-2HSE-25)
- Stainless steel shaft and brass swivel with $\frac{3}{8}$ " NPT female inlet (left side of reel)
- Includes mounting bracket with holes and slots

5HR-222 Models

- **5HR-222** Hose Reel with 25' (8') hose length
- **5HR-222-12** Includes EMV-0522-24 Front Trigger Water Gun



Equip 5HR-232 and 5HR-242 Hose Reel Models

5HR-232

Hose Reels

- Black powder coated steel
- $\frac{3}{8}$ " x 35' (10 m) hose
- Stainless steel shaft and brass swivel with $\frac{3}{8}$ " NPT female inlet (left side of reel)
- Includes mounting bracket with holes and slots

5HR-242

Hose Reels

- Black powder coated steel
- $\frac{3}{8}$ " x 50' (15 m) hose
- Stainless steel shaft and brass swivel with $\frac{3}{8}$ " NPT female inlet (left side of reel)
- Includes mounting bracket with holes and slots

5HR-232-01
5HR-242-01

Includes
5SV-WH Spray Valve



Spray Outlet Options

5SV-WH
Hose Reel Spray Valve




Hose Reel Assembly Replacement Parts

Description	35' (10 m) Open Reel	50' (15 m) Open Reel
Spring Assembly	G016682-45	G016684-45
Complete Swivel Asy.	5HR-2SA	5HR-2SA
Seal Kit	014948-45	014948-45
Hose Assembly	5HR-2HSE-35	5HR-2HSE-50

equip Complete Hose Reel Systems

The equip solution to ensure code compliance and efficiency


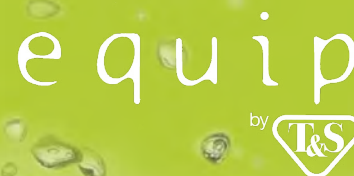


*We offer a wide selection of
equip Complete Hose Reel System models*

E1 System Type

E2 System Type

- 1 Flexible hose connections
- 2 Vacuum breakers
- 3 Open Hose Reels with various length hoses
- 4 Water guns and Spray valves
- 5 Includes Check valves, Risers, and Wall brackets
- 6 Mixing valves and faucet bases

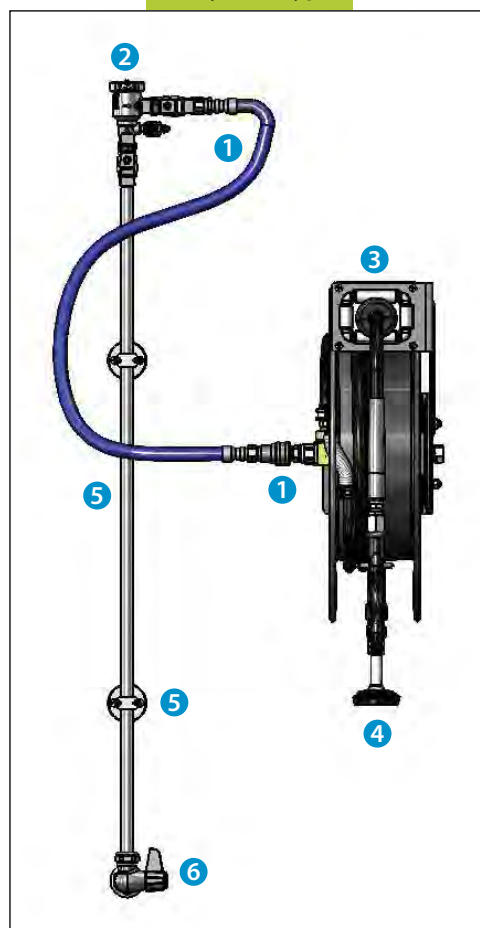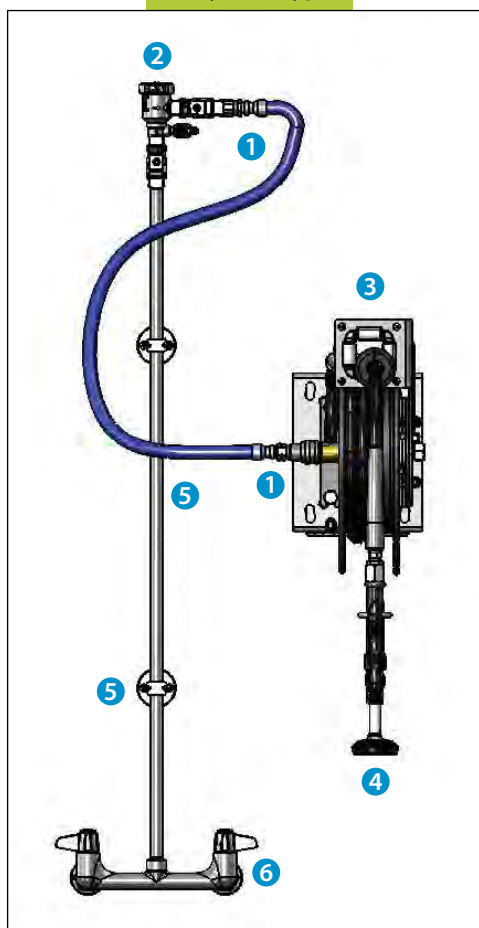

*equip can help you configure a custom system
based on your needs with a wide variety of options*

For more information about our new Equip Hose Reel Systems and a list of available models, see the *Smart Model Key for Equip Complete Hose Reel Systems* on p. 26

Smart Model Key for Equip Complete Hose Reel Systems

Example:


5HR - 2 3 2 - 01 X E1**Hose Reel**222 = 25' (8 m)
x 3/8"232 = 35' (10 m)
x 3/8"242 = 50' (15 m)
x 3/8"342 = 50' (15 m)
x 1/2"**Spray Outlet,
Connector and
Adapter**

-01 = 5SV-WH

-12 = EMV-0522-24

-GH = Garden Hose
Connector-01GH = 5SV-WH
and Garden
Hose
Connector**Mounting
Brackets**P = Pivot/
Ceiling
BracketW = Wall
Swing
BracketT = Table Leg
BracketX = No
Bracket**System
Type***E1 = 8" (203 mm)
Wall Mount
with in-line
check valves
(System 1)E2 = Single Hole
Wall Mount
(System 2)

*System Type:

E1
8" Wall Mount**E2**
Single Hole
Wall Mount

Model (for example):

5HR-232-01WE1

5HR-242-01XE2

Spray Outlet, Adapters and Connectors5SV-WH
Hose Reel Spray
Valve with HandleEMV-0522-24
Front Trigger
Water Gun

Available Models:

Equip Hose Reel Systems Models

5HR-232-01WE1

5HR-232-01XE2

5HR-242-01XE1

5HR-232-01WE2

5HR-242-01WE1

5HR-242-01XE2

5HR-232-01XE1

5HR-242-01WE2

Equip Pre-Rinse Unit Accessories

Add-On Faucets with Swing Nozzles in various lengths

- For pre-rinse units
- $\frac{3}{8}$ " NPT female outlet, $\frac{3}{8}$ " NPT male inlet
- Model No.:

5AFL18	18" (457 mm) Swing nozzle, laminar flow device
5AFL16	16" (406 mm) Swing nozzle, laminar flow device
5AFL14	14" (356 mm) Swing nozzle, laminar flow device
5AFL12	12" (305 mm) Swing nozzle, laminar flow device
5AFL10	10" (254 mm) Swing nozzle, laminar flow device
5AFL08	8" (206 mm) Swing nozzle, laminar flow device
5AFL06	6" (152 mm) Swing nozzle, laminar flow device
5AFL00	Faucet less nozzle

Certified to NSF/ANSI 61/9



Model No.	Description	"H" Inches / mm	"L" Inches / mm
5AFL00	No nozzle	N/A	N/A
5AFL06	6" (152 mm) nozzle	8-1/4" (210 mm)	8-7/16" (214 mm)
5AFL08	8" (206 mm) nozzle	8-13/16" (223 mm)	10-7/16" (265 mm)
5AFL10	10" (254 mm) nozzle	9-5/16" (237 mm)	12-7/16" (316 mm)
5AFL12	12" (305 mm) nozzle	9-7/8" (251 mm)	14-7/16" (367 mm)
5AFL14	14" (356 mm) nozzle	10-7/16" (264 mm)	16-7/16" (418 mm)
5AFL16	16" (406 mm) nozzle	10-15/16" (278 mm)	18-7/16" (468 mm)
5AFL18	18" (457 mm) nozzle	11-1/2" (291 mm)	20-7/16" (519 mm)

5SV Spray Valve for All Equip Pre-Rinse Units

- 3/4-14 inlet
- 2019 DOE Compliant
- 1.15 GPM/4.35 LPM at 60 PSI
- Does not include handle
- Also available:

002856-40 Spray valve bonnet assembly 2019 DOE Compliant

5SV-RK Spray valve repair kit (includes bumper ring, spray face and screw)


5SV-HDL Replacement handle for 5SV- valves



B-0109-01 6" (152 mm) Wall Bracket



014068-45 Overhead Spring



5PR-VB Vacuum Breaker

- Equip vacuum breaker, $\frac{3}{8}$ " NPT, female inlet and outlet
- Dual check valve
- Not for continuous pressure applications



000369-40 Riser

- $\frac{3}{8}$ " NPT ends
- 18" (457 mm) long
- Pre-rinse riser



5SV-C Spray Valve for All Equip Pre-Rinse Units

- 1.2 GPM/4.5 LPM at 60 PSI
- Does not include handle



2019 DOE Compliant

5HSE44 Stainless Steel Hose

- 44" (1118 mm) length
- Flexible stainless steel outer cover
- Rubber inner hose
- Includes (2) washers and grip handle
- Other hose lengths available:

5HSE68	68" (1727 mm) hose
5HSE84	84" (2134 mm) hose
5HSE96	96" (2438 mm) hose



Equip Hose Reel Accessories

5SV-H High Flow Spray Valve

- Not intended for warewashing
- Does not include handle
- 2019 DOE Non-compliant



5SV-H-RK High Flow Spray Face and Bumper Repair Kit

5HR-HDL Hose Reel Grip Handle Assembly

- Black handle assembly with 1/2" NPSM inlet
- Attaches to 5SV-H high flow spray valve
- Includes washer



5HR-2HSE-35 Black Hose Assembly

- 35' (10 m) black hose
- Max. pressure: 300 PSI
- Maximum temp. – 176°F
- Stainless steel spring protector
- 3/8" NPT both ends
- Also available: 5HR-2HSE-50
50' (15 m) black hose



5HR-2SA Swivel Assembly

- 3/8" NPT swivel assembly with stainless steel inlet and brass swivel outlet



5SV-WH Spray Valve, Handle and Ring

- Same as 5SV-H spray valve except includes handle and ring
- 2019 DOE Non-compliant



Equip – Other Accessories

Ceramic Cartridge Assembly

- Quarter-turn
- Hot Cartridge (shown): 013787-45
- Cold Cartridge: 013788-45



5-HDL-W 4" (102 mm) Wrist Action Handle Kit

- Includes one handle and two color coded screws (hot and cold)



5F-VF05 Vandal Resistant Non-Aerated Spray Device

- Water-saving 0.5 GPM/ 1.9 LPM flow
- 3/4-27UN female thread
- Can be substituted on any Equip faucet
- Includes vandal resistant key



5-HDL-L Lever Handle Kit

- Includes one handle and two color coded screws (hot and cold)



B-0425-M Deck Mount Inlet Kit

- 1/2" NPT on both ends of 2" (51 mm) long nipples, lock nuts and lock washers
- Includes (2)



B-0230-K Wall Mount Inlet Kit

- 1/2" NPT close nipples, lock nuts and washers
- 1/2" NPT male and female short el
- Includes (2)



Equip Goosenecks/Nozzles

Swing Nozzles

- 3/4-27 Laminar outlet
- Available:

5SP-18	18" (457 mm) swing nozzle
5SP-16	16" (406 mm) swing nozzle
5SP-14	14" (356 mm) swing nozzle
5SP-12	12" (305 mm) swing nozzle
5SP-10	10" (254 mm) swing nozzle
5SP-08	8" (206 mm) swing nozzle
5SP-06	6" (152 mm) swing nozzle



Certified to NSF/ANSI 61/9

5SP-03 3" Rigid Gooseneck

- 3/4-27 Laminar outlet
- 5" (127 mm) clearance
- 8-3/4" (222 mm) height



5SP-05 Swivel Gooseneck

- 3/4-27 Laminar outlet
- 5-3/4" (147 mm) clearance
- 11-1/16" (281 mm) height

5SP-05

OPTIONS – Equip Goosenecks/Nozzles with 2.2 GPM / 8.3 LPM Aerators

5SP-03A 3" (76 mm) Swivel Gooseneck

- 3/4-27 2.2 GPM aerator outlet
- 5-5/16" (135 mm) clearance
- 9-1/8" (232 mm) height



5SP-08A 8" (207 mm) Swing Noz:

- 3/4-27 2.2 GPM aerator outlet
- 4-5/8" (117 mm) height



5SP-05A 5½" (141 mm) Swivel Gooseneck

- 3/4-27 2.2 GPM aerator outlet
- 5-3/4" (146 mm) clearance
- 11-1/16" (281 mm) height



5SP-10A 10" (254 mm) Swing Nozzle

- 3/4-27 2.2 GPM aerator outlet
- 5-1/8" (130 mm) height



5SP-06A 6" Swing Nozzle

- 3/4-27 2.2 GPM aerator outlet
- 4-1/16" (103 mm) height



5SP-12A 12" (308 mm) Swing Nozzle

- 3/4-27 2.2 GPM aerator outlet
- 5-11/16" (144 mm) height



Certified to NSF/ANSI 61/9

equip

by



2 Saddleback Cove • Travelers Rest, SC 29690
Phone (800) 891-4808 • tsbrass.com

800-014249-45 Rev. 14 6/25